


KWC F5E-Mix

Electronic pillar mixer with battery operation

Modell-Linie: **F5E** | **F5EM1001** | **2030027923** | EAN/GTIN: **7612982239526**
Taps | Electronic taps

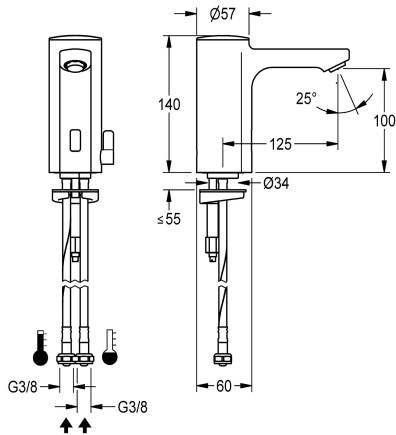

Article Number

2030027923

2030031350

2030039427
with flow regulator 3.0 l/min

volume flow rate at 3 bar

0.08 l/s

0.08 l/s

0.05 l/s

F5E-Mix pillar mixer DN 15 for sanitary facilities, opto-electronically controlled. For connection to hot and cold water via hoses with integrated backflow preventer and strainers. Control electronics, solenoid valve cartridge, 6 V lithium battery (CR-P2) and sensor in all-metal housing, high-polished chromium-plated brass. Temperature lever with adjustable, turn-proof temperature

stop as well as conversion set for concealed mixing device. Anti-theft aerator, design SLIM, with integrated flow regulator 5.0 l/min. Activated water hygiene flushing 24 hours after last activation, safety switch-off with continuous reflection and saving of statistical data. With option for parameterization and communication via optional, bidirectional remote control.

Technical Data

with backflow preventer

calculation flow rate cold wat

calculation flow rate hot wat

compatible A3000 open

default automatic hygiene flus

depressurised

with filter

functional principle

hygiene flushing

diameter nominal

inlet size

Locking mechanism

material fitting

minimum flow pressure

type of mixing

number of batteries

Parameterization

Pop-up waste set

power supply connection

Type of power supply

true

0.07 l/s

0.07 l/s

false

24h after the last activity

false

true

electronic self-closing

true

DN 15

G 3/8

Top section, non-ceramic

brass-look

1 bar

true

1

remote control

false

Battery 6 V

Battery



KWC F5E-Mix

Electronic pillar mixer with battery operation

Modell-Linie: **F5E** | **F5EM1001** | **2030027923** | EAN/GTIN: **7612982239526**
Taps | Electronic taps

protective system IP	IP59K
with rosettes/cover plate	false
protective shutdown	true
sound insulation	false
Spout	fixed
spout projection	125 mm
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	true
thermal disinfection	false
with transformer/power supply	false
type of batteries	CR-P2 Lithium battery 6V
type of mounting	tap hole
type of operation	sensor operation
type of sensor	opto-electronic sensor
type of tap	pillar tap
volume flow rate at 3 bar	0.08 l/s
water connection	hose (gland nut)
Accent colour	none
Basic colour	chrome-look (glossy)

Optional Accessories



Bidirectional remote control for electronic fittings F3 and F5

2030036654

ACEX9005



2-button remote control for fittings F3 and F5

2030036849


ACEX9004



Socket

2030040334


ACEX1001



Anti-twist protection for F5S

2030035383

ACXX1001



KWC F5E-Mix

Electronic pillar mixer with battery operation

Modell-Linie: F5E | F5EM1001 | 2030027923 | EAN/GTIN: 7612982239526

Taps | Electronic taps

PURETHERM under-table thermostat

2030012758

PURE0031

5.0 l/min aerator, angle-adjustable

2030041326

ACXX1002

3.0 l/min. aerator

2030041424



ASXX1008

Aerator 1.8 l/min

2030041442

ACXX1005

Spare Parts



Aerator 5.0 l/min

2030041011

ASXX1004

Mounting key

2030041329

ACXX1003

Cap



2030041558

ASEX1007

Battery compartment

3600002063

ACEX9023



Lithium battery 6 V

2000104846

EPRT0008

Solenoid valve cartridge

2030045522

ACXX9002

Temperature selection lever




2030041431

ASEM1001

Hose

2030041320

ASXM1001



Quick-action fastener

Water way

Sensor, ID 01/00004

Plug blue

KWC F5E-Mix

Electronic pillar mixer with battery operation

Modell-Linie: F5E | F5EM1001 | 2030027923 | EAN/GTIN: 7612982239526

Taps | Electronic taps

2030043596

ASEX1013

2030041949


ASEX1008

2030041458

ASEX1005

2030041952

ASEX1010



Plug red

2030041951

ASEX1009